

LT8711H-CE --- Product Brief

Type-C/DP1.2 to HDMI2.0 Converter

Features

● USB Type-C

- Compliant with VESA DisplayPort Alt Mode on USB Type-C standard V1.0
- Compliant with USB Power Delivery specification R2.0, V1.0
- Compliant with USB Type-C Cable and Connector specification R1.2
- Compliant with HDMI 1.4b Alt Mode on USB Type-C specification V1.0
- Compliant with DP Alt Mode 1.0, PD 2.0, Type-C 1.2, HDMI1.4b Alt Mode 1.0
- Built-in CC controllers for charger and normal communication
- 3 data roles supported: DFP, UFP and DRP
- 2 power roles supported: source and sink

● DP1.2 Receiver

- Compliant with VESA DP1.2 and Embedded DisplayPort (eDP) v1.4
- No HDCP decryption
- 1/2/4 configurable data lanes
- 1.62/2.7/5.4Gbps per data lane
- Support SSC
- 1Mbps AUX channel
- Receiver PHY is HDMI signal compatible
- Adaptive or programmable receiver equalization
- Support lane swap(arbitrarily) and polarity inversion(independent)
- Support 4k@60Hz
- Support eDP Authentication: Alternative Scramble Seed Reset and Alternative Framing
- Fast and full Link Training for Embedded DisplayPort system

● HDMI2.0 Transmitter

- Compliant with HDMI2.0, HDMI1.4 and DVI1.0
- Data rate up to 6Gbps
- Support 4k@60Hz
- Support TMDS scrambling for EMI/RFI reduction
- Support SCDC
- Support channel swap(arbitrarily) and polarity inversion(independent)
- Programmable transmitter swing and pre-emphasis
- Downstream receiver sensing
- 5V tolerance DDC/HPD I/Os


● Miscellaneous

- DP receiver to HDMI transmitter bypass to support HDMI Alt Mode
- Support Swift Charge
- Internal or external oscillator
- Integrated microprocessor
- Embedded SPI flash for firmware
- GPIOs for VBUS/VCONN/AUX and other system controls
- Integrated 100/400kHz I2C slave
- Firmware update through SPI, I2C or AUX interface
- Low power consumption
- Power supply: 3.3V for I/O and 1.2V for core
- ESD 4kV HBM
- Temperature range: -40°C ~ +85°C
- Package 7.5mmx7.5mm QFN64

Description

The LT8711H-CE is a high performance Type-C/DP1.2 to HDMI2.0 converter, designed to connect a USB Type-C source or a DP1.2 source to an HDMI2.0 sink.

The LT8711H-CE integrates a DP1.2 compliant receiver, and an HDMI2.0 compliant transmitter. Also, one CC controller is included for CC communication to implement DP Alt Mode and power delivery function, because it is one DRP Dual Role port .

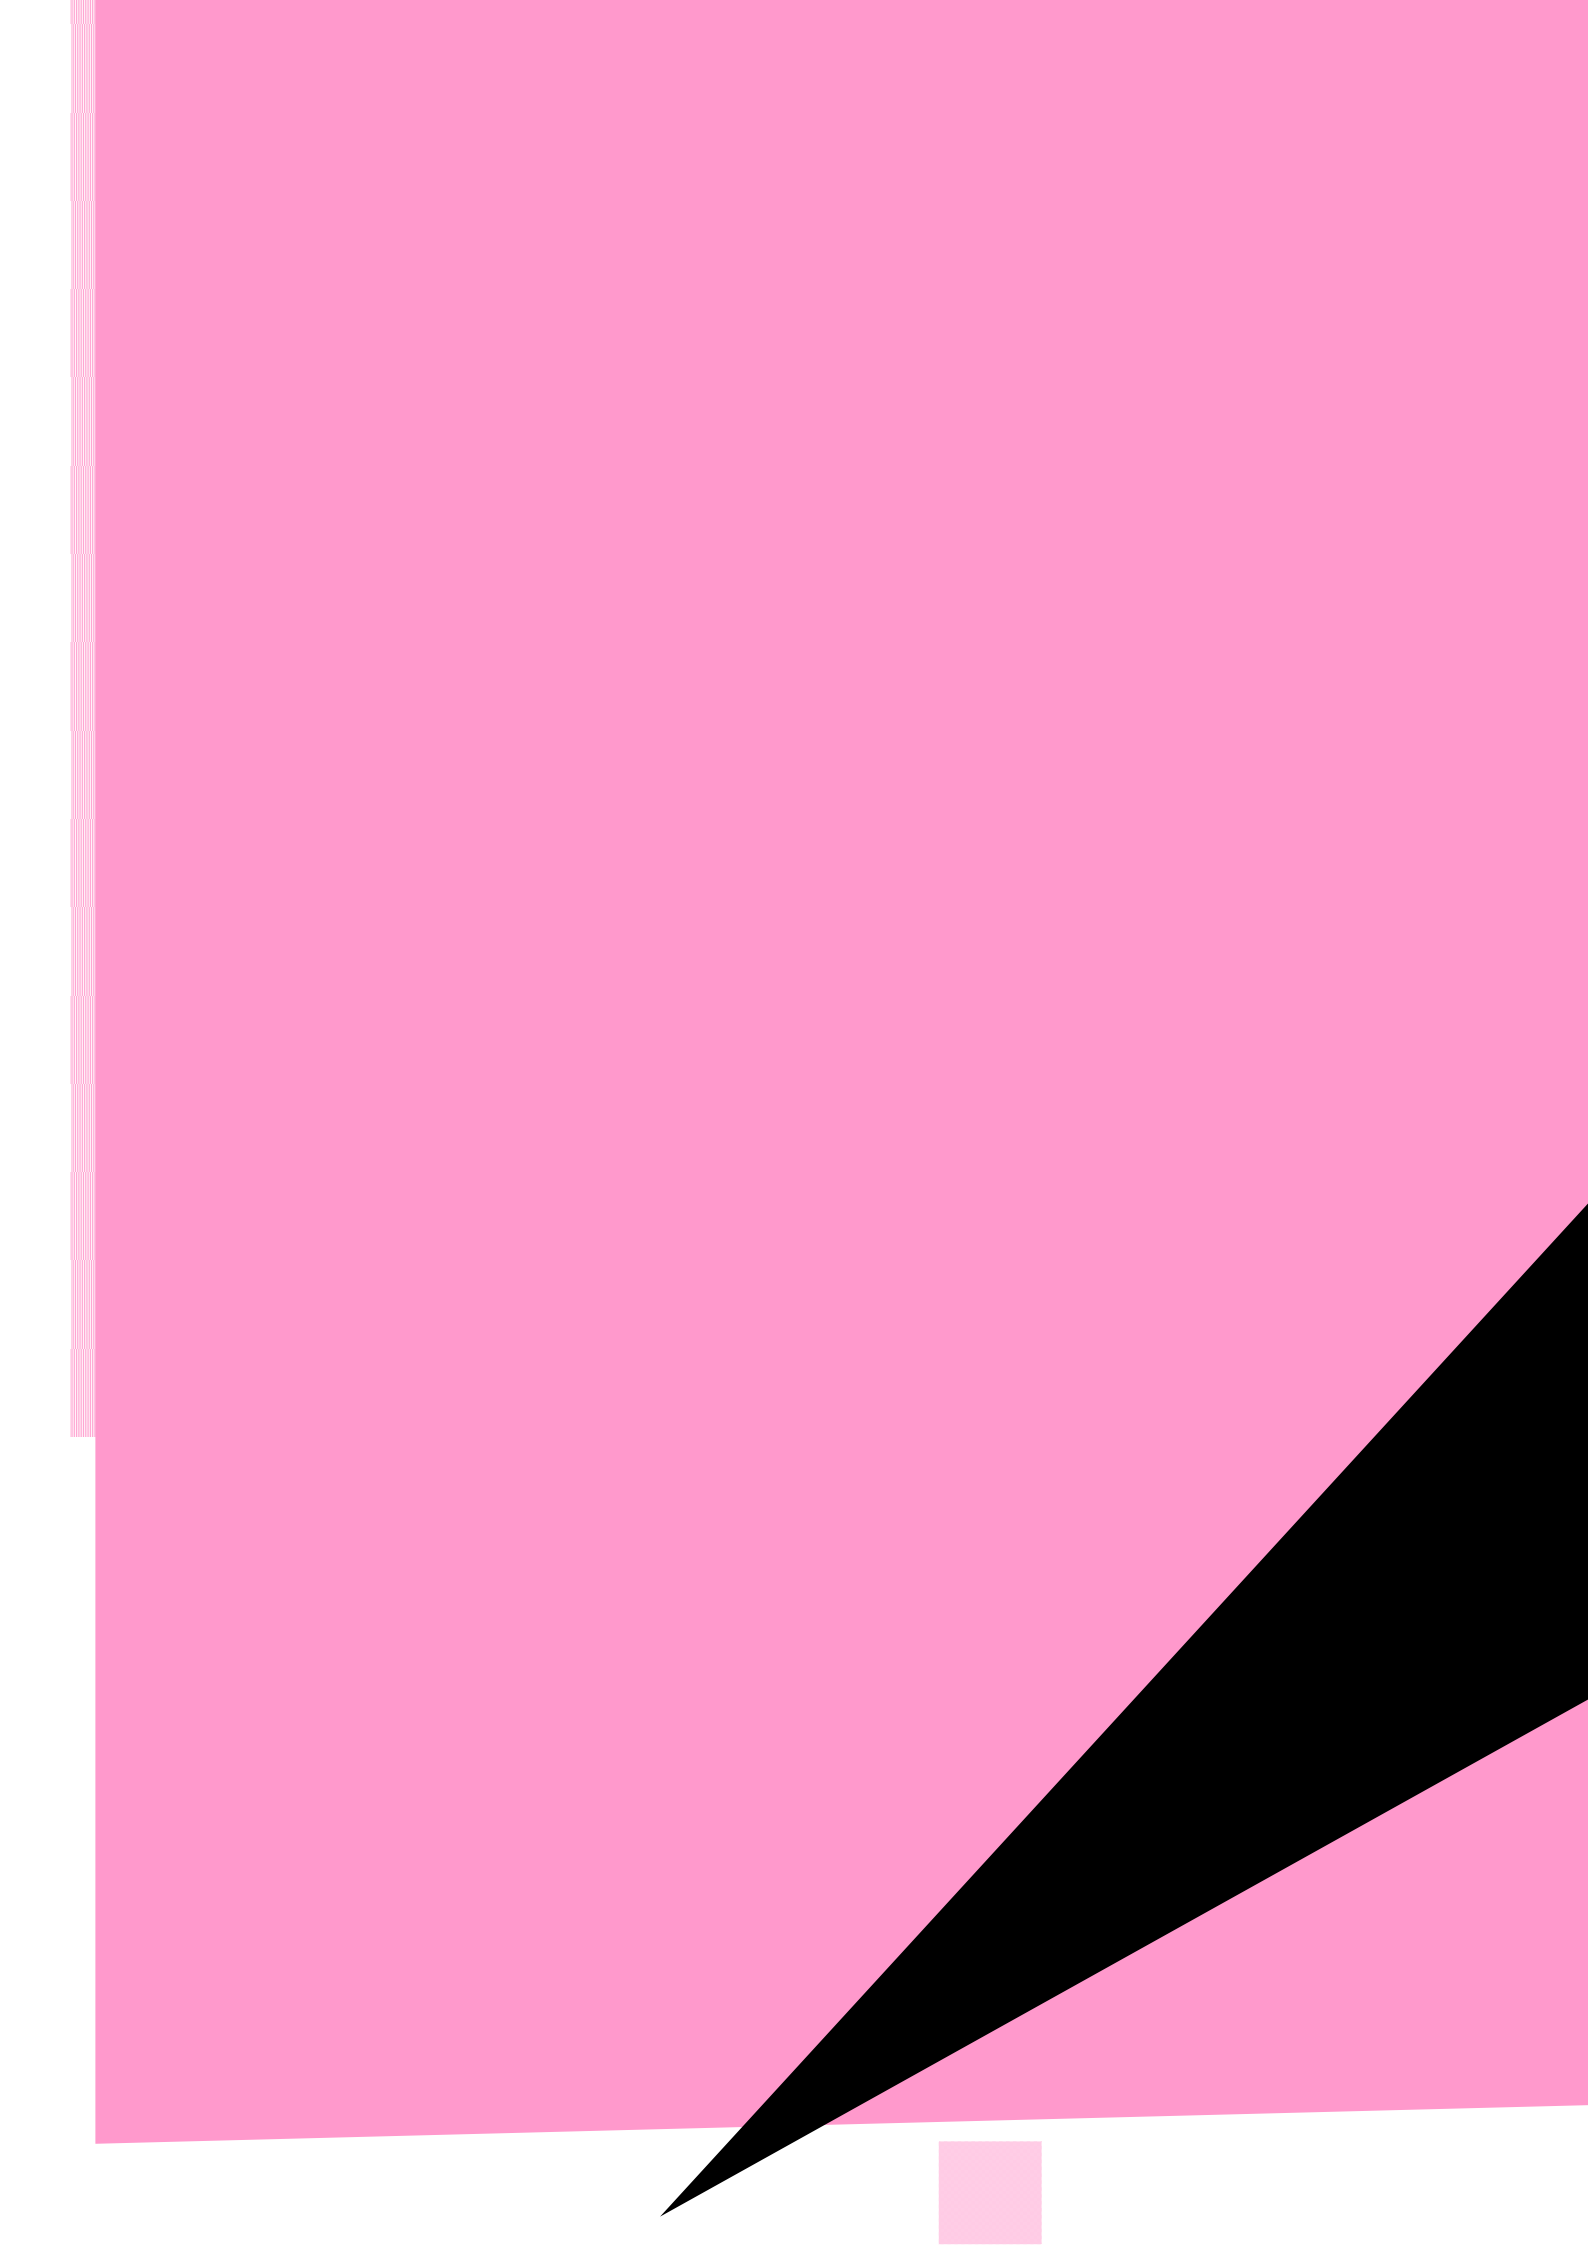

Copyright © 2017 Lontium Semiconductor Corporation, All rights reserved.

Lontium Semiconductor Proprietary & Confidential

This document and the information it contains belong to Lontium Semiconductor. Any review, use, dissemination, distribution or copying of this document or its information outside the scope of a signed agreement with Lontium is strictly prohibited.

LONTIUM DISCLAIMS ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THOSE OF NONINFRINGEMENT, MERCHANTABILITY, TITLE AND FITNESS FOR A PARTICULAR PURPOSE. CUSTOMERS EXPRESSLY ASSUME THEIR OWN RISK IN RELYING ON THIS DOCUMENT.

LONTIUM PRODUCTS ARE NOT DESIGNED OR INTENDED FOR USE IN LIFE SUPPORT APPLIANCES, DEVICES OR SYSTEMS WHERE A MALFUNCTION OF A LONTIUM DEVICE COULD RESULT IN A PERSONAL INJURY OR LOSS OF LIFE.

Lontium assumes no responsibility for any errors in this document, and makes no commitment to update the information contained herein. Lontium reserves the right to change or discontinue this document and the products it describes at any time, without notice. Other than as set forth in a separate, signed, written agreement, Lontium grants the user of this document no right, title or interest in the document, the information it contains or the intellectual property in embodies.

Trademarks

Lontium™ and ClearEdge™ is a registered trademark of Lontium Semiconductor. All Other brand names, product names, trademarks, and registered trademarks contained herein are the property of their respective owners.

Visit our corporate web page at: www.lontiumsemi.com

Technical support: support@lontium.com

Sales: sales@lontium.com